

# MUG

## Jasmine

Single pendant



Spec sheet

JS-01

# Jasmine

Single pendant

**GLASS FINISH** Champagne  
Steel gray  
Light gray  
Blue shaded  
Pink shaded  
Champagne shaded  
Green shaded

**STRUCTURE FINISH** Pewter  
Bronze

**MATERIALS:**

**INNER DIFFUSER** Borosilicate glass

**OUTER DIFFUSER** Mouth-blown glass

**STEM** Aluminum


**LIGHT SOURCE** INTEGRATED LED MODULE 5W 24V  
3000°K 728lm CRI 90+

**VOLTAGE** 220 - 240V 50Hz  
120V 60Hz

**DRIVER** ON-OFF (standard)  
Dimmable on request

**ENVIRONMENT** Indoor

**CERTIFICATION**  UL WIRED  IP20

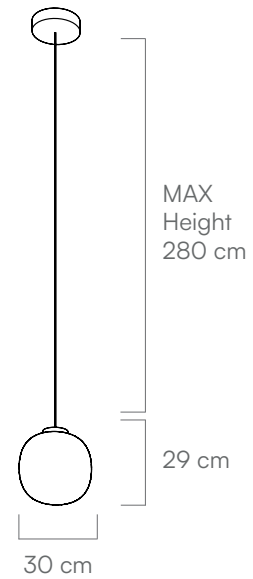

Product nomenclature of standard variation (custom solutions are available on request)

JS		O1		P		P		CH		D		E		T	
Family		# lights		Model		Body color		Glass color		Control		Input		CCT	
JS	Jasmine	01	1x	P	Pendant	PW	Pewter	CH	Champagne	D	DALI	E	24V/230V 50Hz	1	3000°K
		03	3x			BZ	Bronze	SG	Steel gray	1	On/off	U	24V/120V 60Hz	2	2.700°K
		06	6x			SI	Silver	LG	Light gray	0	0-10V	F	230V 50Hz		
		10	10x					BS	Blue shaded	T	Triac	G	120V 60Hz		
		12	12x					PS	Pink shaded	C	Casambi				
		18	18x					CS	Champagne shaded	P	Phase-cut dim				