

MUG

Jasmine

Six-light chandelier



Spec sheet

JS-06

Jasmine

Six-light chandelier

GLASS FINISH

Champagne
Steel gray
Light gray
Blue shaded
Pink shaded
Champagne shaded
Green shaded

STRUCTURE FINISH

Pewter
Bronze

MATERIALS:

INNER DIFFUSER

Borosilicate glass

OUTER DIFFUSER

Mouth-blown glass

STEM

Aluminum

LIGHT SOURCE

INTEGRATED LED MODULE 30W 24V
3000°K 4368lm CRI 90+

VOLTAGE

220 - 240V 50Hz
120V 60Hz

DRIVER


ON-OFF (standard)
Dimmable on request

ENVIRONMENT

Indoor

CERTIFICATION

CE UL WIRED  IP20

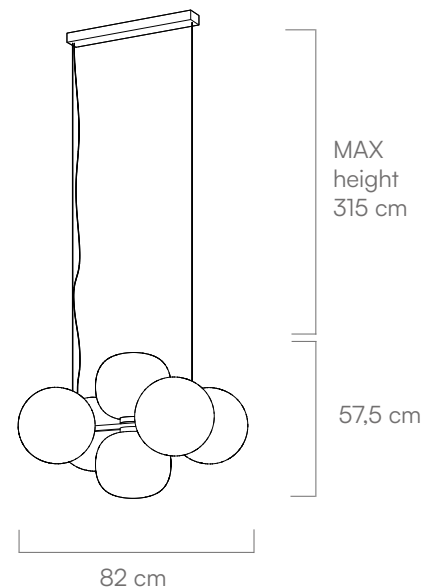

Product nomenclature of standard variation (custom solutions are available on request)

JS	-	06	-	C	-	PW	-	CH	-	1	-	E	-	1
COLLECTION	LIGHTS		MODEL		STRUCTURE FINISHES		DIFFUSER FINISH		CONTROL		INPUT		CCT	
JS - Jasmine	01 - Single		P - Pendant		PW - Pewter		CH - Champagne		1 - On/off (standard)		E - 230V 50Hz		1 - 3000° K	
	03 - 3 Lights		C - Chandelier		BZ - Bronze		SG - Steel gray		D - Dali		U - 120V 60H		2 - 2700° K	
	06 - 6 Lights						LG - Light gray		O - 0-10V					
	10 - 10 Lights						BS - Blue shaded		T - Triac					
	12 - 12 Lights						PS - Pink shaded							
	18 - 18 Lights						CS - Champagne shaded							